



The Add-On-Profile (AOP) will only work with RSLogix5000 version 15 or greater.
The AOP is provided in Zip file format.

Install Instructions:


1. Create a new folder on the computer that contains the RSLogix5000 program.
2. Copy the AOP Zip file to the new folder.
3. Extract the Zip file contents to the new folder.
4. Run the file MPSETUP.EXE. Follow prompts on install screens. The AOP files will be added to your RSLogix5000 program.
5. Within RSLogix5000 the AOP can be found, when adding a new ControlNet or Ethernet/IP module in the I/O configuration.

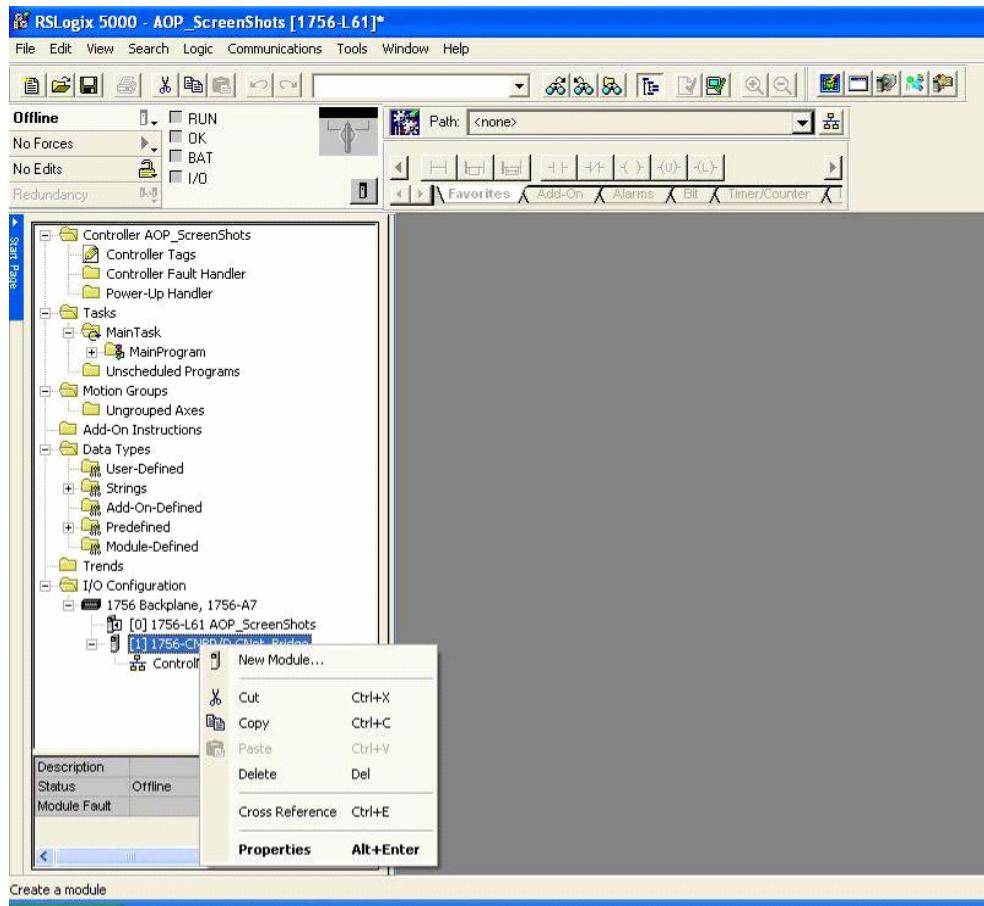

6. Select the required Mettler-Toledo module from the list of modules as shown in the By Vendor tab.

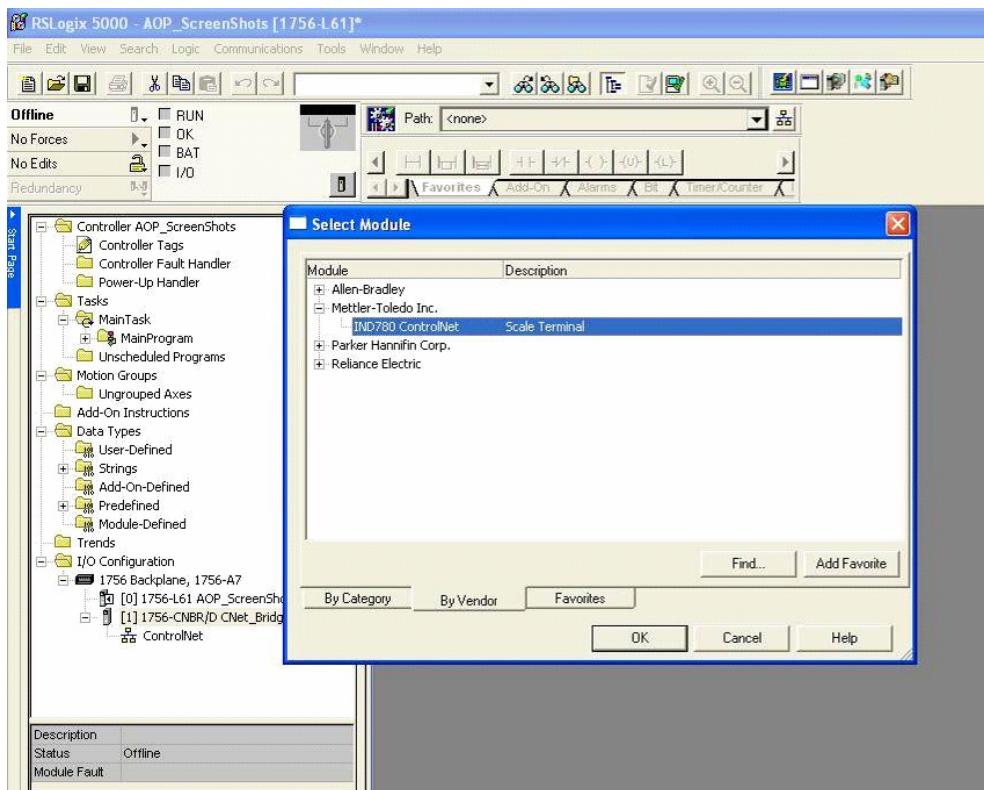

7. Upon selecting the module, the new module data definitions are shown.
8. Enter an appropriate name, description and network node address for the module.

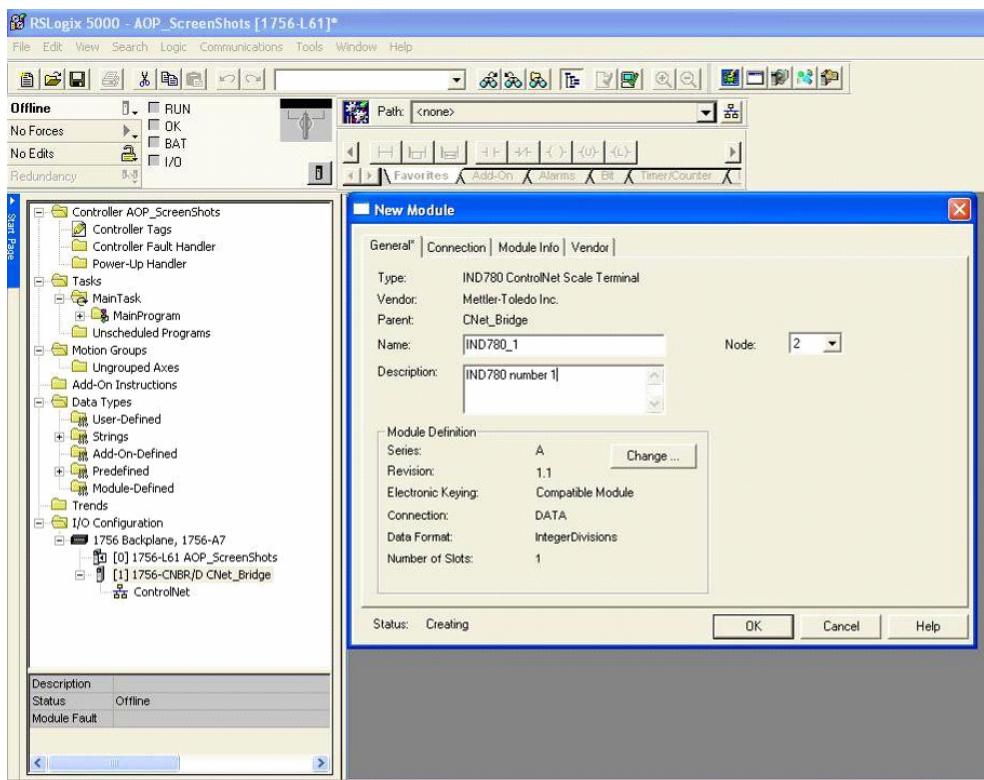

9. If required, click on the 'Change' button to edit the Revision, Data Format and Number of Slots used by the module.
10. Accept the changes, and click 'OK' to complete the module definitions, this will then create the Input and Output Data Tags accordingly.
11. Refer to the Help files found on the Vendor tab for further details on configuration and I/O definitions.

