REVISIONS							
MODEL NO.	PART NO.	REV	SYM	CONTENTS	DRAWN	CHECKED	APPROVED

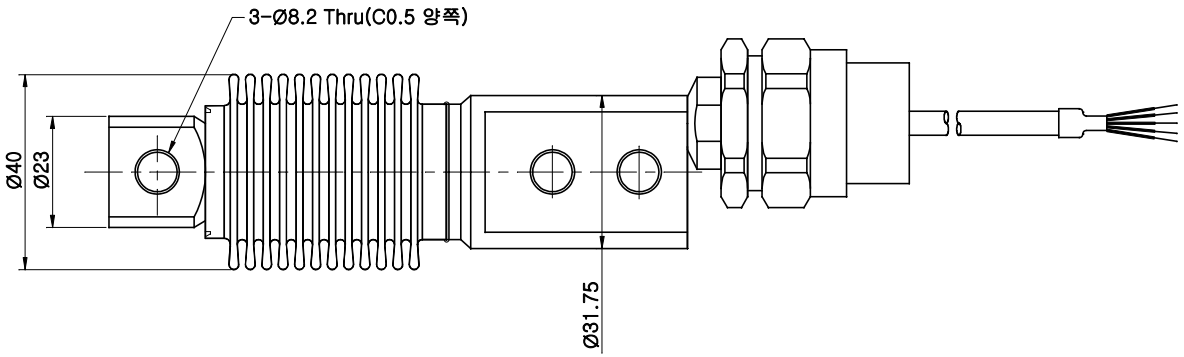

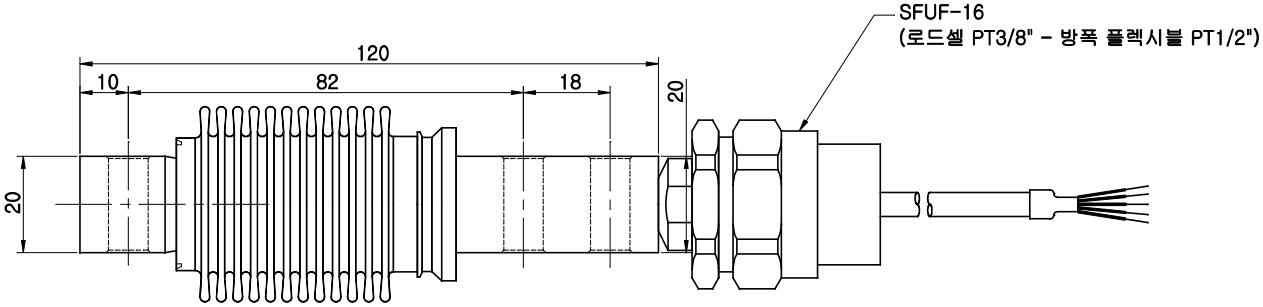

Capacity(용량)	kgf	20,50,100,200,500
Rated Output(정격 출력)	mV/V	2.0 ± 0.005
Zero Balance(무부하 범위)	mV/V	0.0±0.02
Combined Error(종합 오차)	%RO	0.03
Repeatability(반복 출력 허용)	%RO	0.01
Creep for (30min)N분출력편차	%RO	0.03
Temperature effect on(온도변화에 따른 변위)		
Zero Value(영점값)	%RO/10°c	0.028
Output Value(출력값)	%RO/10°c	0.015
Excitation(인가전압)		
Recommended(권고 전압)	V	10
Maximum(최대 전압)	V	15
Resistance(저항)		
Input(입력저항)	Ω	400±50
Output(출력저항)	Ω	350±3.5
Insulation(절연저항)	MΩ	>2000@50V DC
Compensated Temp.Range	°c	-10 ~ +40
Operating Temp.Range(작동범위)	°c	-30 ~ +80

Cable : PVC Ø5 - 3M
Cable Color Code
Red ▷ Ex+
White ▷ Ex-
Green ▷ Sig+
Blue ▷ Sig-
Black ▷ Sh

NO	TITLE	MATERIAL	Q'TY	REMARKS
TOLERANCES UNLESS OTHERWISE SPECIFIED	NAME OR TITLE: Explosion proof version CHBS,Specifications (Ex d IIC T6)	CURIOSITY TECHNOLOGY CURIOTEC. CO. LTD 581-1,Yongmi-ri, Goangtan-mueon, Paju-si, Gyeonggi-do, South KOREA. 413-855		
ANGULAR ± 0.1				
DECIMAL ± 0.1	FIRST USED IN ASSEMBLY	MATERIAL: Stainless Steel		
Q'TY/SET	FIRST MADE FOR	END FINISH		
	CONTRACT OR CUSTOMER NO	DIMENSIONS ARE IN (MM), INCH		

DRAWN	CHECKED 1	CHECKED 2	APPROVED	SCALE	DREWING.PART NO.	REV
D.J.KANG				N/S	CHBS-SPEC	V0
2016.07.11						