



◎ FEATURES

- Tension application
- Application for limited space
- Small size
- Protection class IP67



◎ Material

- Stainless steel

◎ Cable

- Braided shield 4-wire round cable with PVC - jacket (1.5m)

◎ DIMENSIONS

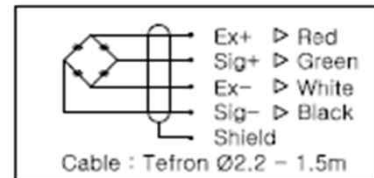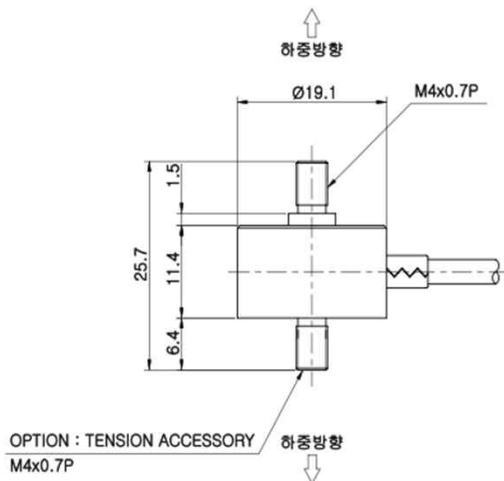

◎ SPECIFICATIONS

Max. Capacity	kgf	5, 10, 20, 50 kgf
Rated output	mV/V	2.0 ± 0.2
Zero balance	mV/V	0.0 ± 0.04
Combined error	%	0.15
Repeatability	%	0.05
Creep(30min.)	%	0.05
Temperature effec on		
Zero value	%/10℃	0.05
Output value	%/10℃	0.1
Excitation		
Recommended	V	10
Maximum	V	15
Resistance		
Input	Ω	420 ± 50
Output	Ω	350 ± 3.5
Insulation	MΩ	> 2,000 @50V DC
Compensated temp.range	℃	-10 ~ +40
Operating temp. range	℃	-20 ~ +80

* Specifications are subject to change without notice