

FEATURES

- Sub Miniature dimension
- Compression application
- Application for limited space

Material


- Stainless steel

Cable

- Tefron cable



DIMENSIONS

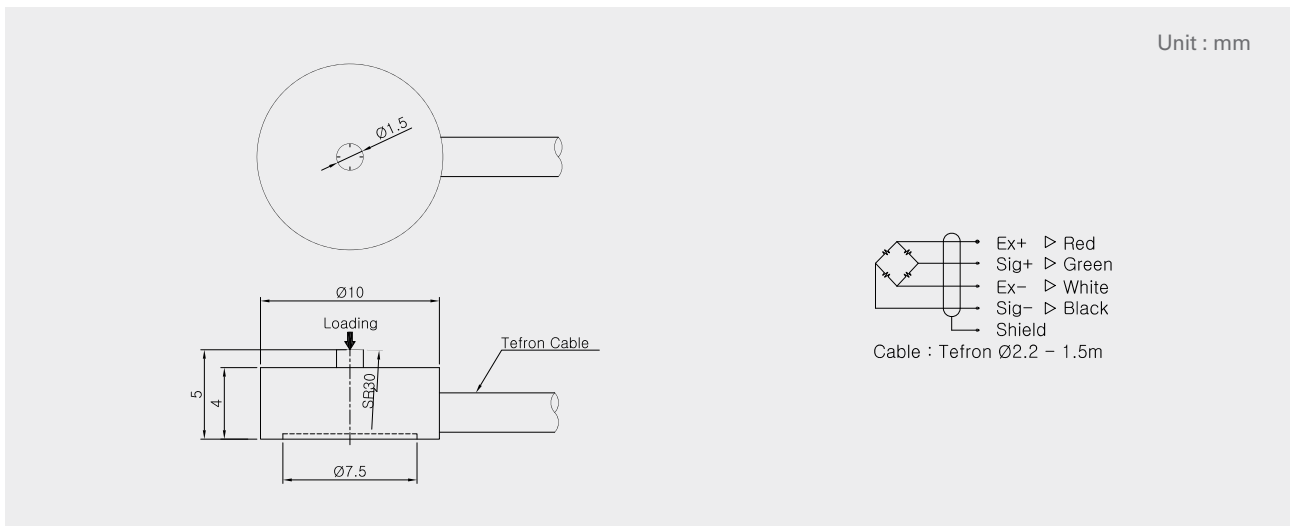

SPECIFICATIONS

Max. Capacity		kgf	5, 12.5, 25 kgf
Rated output		mV/V	1~2
Zero balance		mV/V	0.0 ± 0.1
Combined error		%RO	± 0.5
Repeatability		%RO	± 0.1
Creep (30min.)		%RO	± 0.5
Temperature effect on	Zero value	%RO/10°C	± 0.36
	Output value	%RO/10°C	± 0.36
Excitation	Recommended	V	5
	Maximum	V	15
Resistance	Input	Ω	350 ± 3.5
	Output	Ω	350 ± 3.5
	Insulation	M Ω	>2,000@50V DC
Compensated temp. range		°C	-10 ~ +40
Operating temp. range		°C	-20 ~ +80