



### FEATURES

- Fully environmental protection IP67
- Tension or compression applications
- Suitable for hanging scales


### Material

- Stainless steel

### Cable

- Braided shield 4-wire round cable with PVC - jacket

### DIMENSIONS

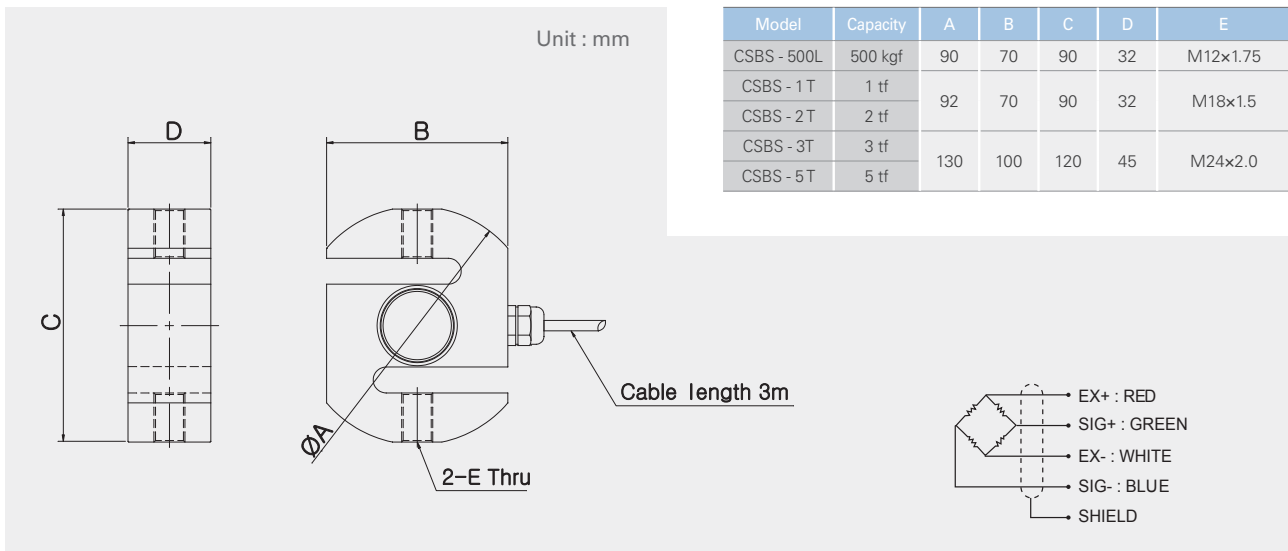

### SPECIFICATIONS

Max. Capacity		kgf, tf	500 kgf, 1, 2, 3, 5 tf
Rated output		mV/V	2.0 ± 0.005
Zero balance		mV/V	0.0 ± 0.03
Combined error		%RO	0.03
Repeatability		%RO	0.01
Creep (30min.)		%RO	0.03
Temperature effect on	Zero value	%RO/10°C	0.028
	Output value	%RO/10°C	0.014
Excitation	Recommended	V	10
	Maximum	V	15
Resistance	Input	Ω	430 ± 20
	Output	Ω	350 ± 3.5
	Insulation	MΩ	>2,000 @50 V DC
Compensated temp. range		°C	-10 ~ +40
Operating temp. range		°C	-20 ~ +80