

SSBA-S

S-Type Load Cell

10, 20, 50, 100, 150, 200, 250 kgf

FEATURES

- Tension or compression applications
- Small size
- Protection class IP65

Material


- Anodized Aluminum (10, 20kgf)
- Stainless Steel (50,100,150,200,250kgf)

Cable

- Braided shield 4-wire round cable with PVC - jacket



DIMENSIONS

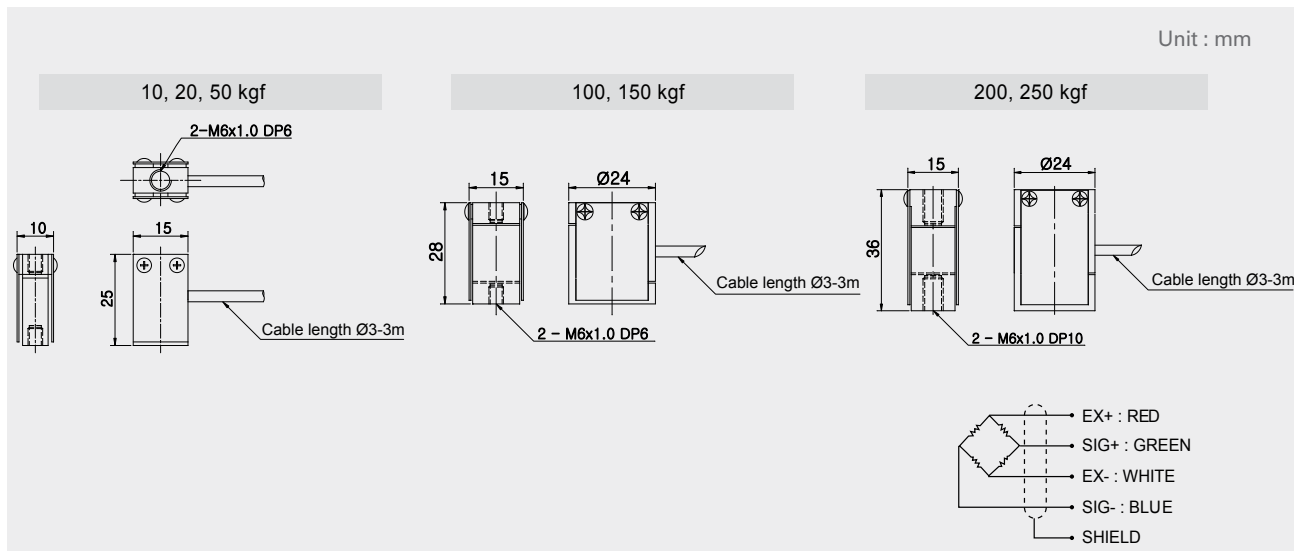

LOAD CELL
S-Type Load Cell

SPECIFICATIONS

Max. Capacity		kgf	10, 20, 50, 100, 150, 200, 250 kgf
Rated output		mV/V	2.0 ± 0.1
Zero balance		mV/V	0 ± 0.1
Temperature effect on	Combined error	%RO	0.1
	Repeatability	%RO	0.05
	Creep (30min.)	%RO	0.1
	Zero value	%RO/10°C	0.1
	Output value	%RO/10°C	0.1
Excitation	Recommended	V	10
	Maximum	V	15
Resistance	Input	Ω	380 ± 30
	Output	Ω	350 ± 3.5
	Insulation	MΩ	> 2,000 @50V DC
Compensated temp. range		°C	-10 ~ +40
Operating temp. range		°C	-20 ~ +80