



Tension Clevis Accessories

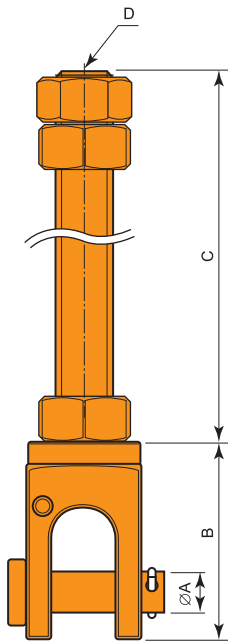

Model	Capacity	A	B	C	D
TPK	50kgf, 100kgf, 200kgf, 300kgf	12	55	280	M16×2
	500kgf, 1tf				
	2tf, 3tf, 5tf	22	89	270	M24×3
LCK1205	20kgf, 50kgf, 100kgf	6	38	285	M12×1.75
	200kgf, 500kgf, 1tf	12	55	280	M16×2
	3tf, 5tf	22	89	270	M24×3
LC8118	100kgf, 200kgf, 500kgf, 1tf	12	55	280	M16×2
	2tf, 3tf, 5tf	22	89	270	M24×3
LC8105	50kgf, 100kgf	6	38	285	M12×1.75
	200kgf, 500kgf, 1tf	12	55	280	M16×2


Beam Accessories

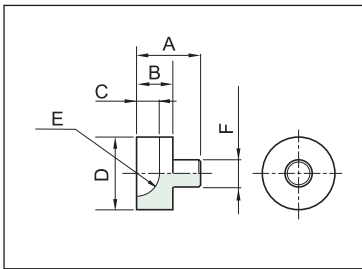

Features

- Provides point loading for maximum accuracy
- For use with most popular single-ended beams
- Zn plated hardened alloy steel or stainless steel
- LC8406, LC8407, LC8407S


Model	Capacity	A	B	C	D	E	F
CBCUPT-1	150kgf, 300kgf, 500kgf, 1tf, 2tf	26	11	6	29	17	13
CBCUPT-2	3tf, 5tf	38.5	20	10	45	20	19.5
CBCUPT-2	10tf	44.5	24.5	11.5	48	30	25.4

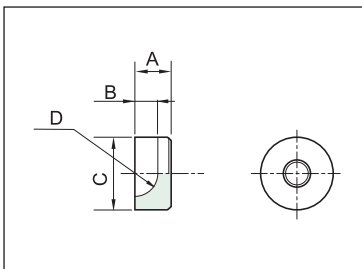

Features

- Provides point loading for maximum accuracy
- For use with most popular single-ended beams
- Zn plated hardened alloy steel or stainless steel
- LC8406, LC8407, LC8407S

Model	Capacity	A	B	C	D
CBCUPT-4	150kgf, 300kgf, 500kgf, 1tf, 2tf	11	6	29	17

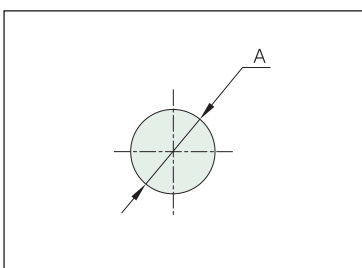

Ball

Features

- Use with ball cup and load receiver to build a custom scale
- Reliable hardened
- Reliable chrome plating
- LC8406, LC8407, LC8407S

Model	Capacity	A
B-1	500kgf, 1tf, 2tf	17.4
B-2	3tf, 5tf, 10tf	30.0