



FEATURES

- Off center compensated
- Protection class IP65

Material

- Anodized Aluminum • Stainless Steel Cover

Cable

- Braided shield 4-wire round cable with PVC - jacket

Mounting

- Socket-head cap screw
- M6 x 1.0 (10.9)
- Tightening torque : 14Nm

Maximum Platform Size


- 400 x 400 mm

Ordering Information

- CBCC -xxx "L"

Capacity in kgf

DIMENSIONS

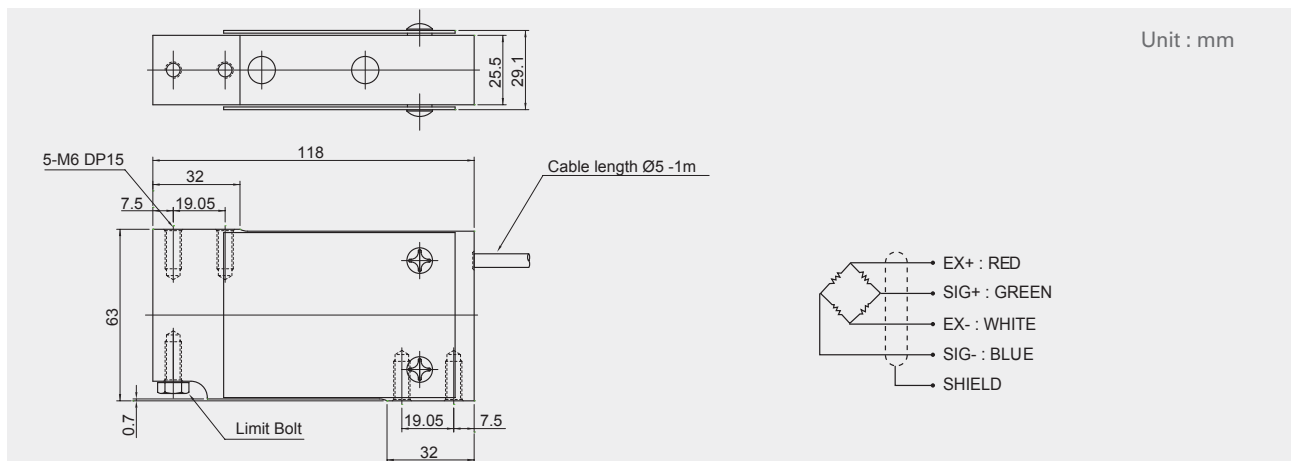

SPECIFICATIONS

Max. Capacity	kgf	3, 5, 7, 10, 15, 20, 30 kgf
Rated output	mV/V	2.0 ± 0.2
Zero balance	mV/V	0 ± 0.1
Combined error	%RO	0.02
Repeatability	%RO	0.01
Creep (30min.)	%RO	0.017
Temperature effect on		
	Zero value	%RO/10°C
	Output value	%RO/10°C
Excitation		
	Recommended	V
	Maximum	V
Resistance		
	Input	Ω
	Output	Ω
	Insulation	MΩ
Compensated temp. range	°C	-10 ~ +40
Operating temp. range	°C	-20 ~ +80