
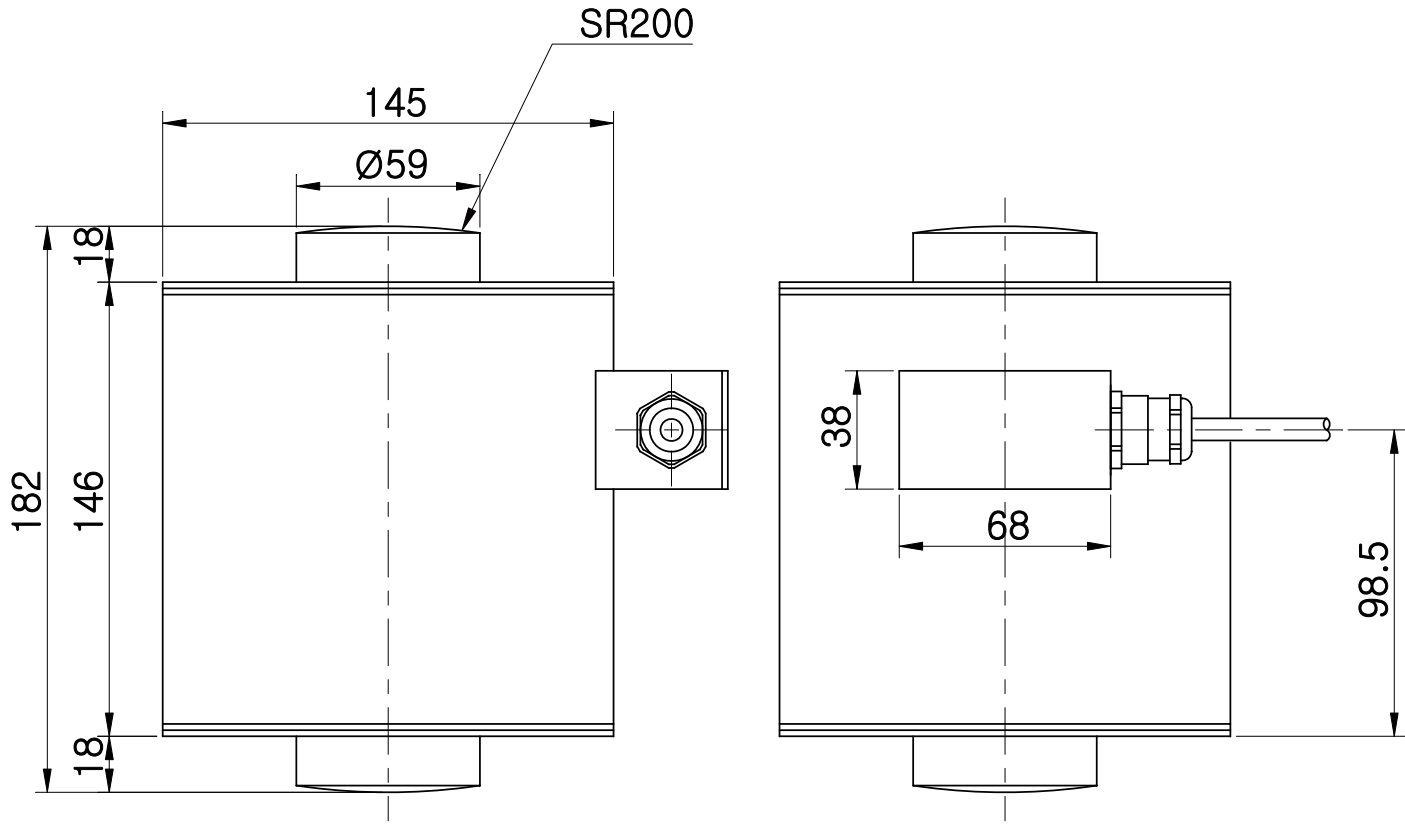


REVISIONS		DESCRIPTION	DRAWN	CHECKED	APPROVED
REV	DATE				
0	-	-	-		

Capacity(용량)	tf	70
Rated Output(정격 출력)	mV/V	2.0±0.2
Zero Balance(무부하 범위)	mV/V	0.0±0.02
Combined Error(종합 오차)	%RO	0.1
Repeatability(반복 출력 허용)	%RO	0.1
Creep for (30min)N분출력편차	%RO	0.1
Temperature effect on(온도변화에 따른 범위)		
Zero Value(영점값)	%RO/10°C	0.05
Output Value(출력값)	%RO/10°C	0.05
Excitation(인가전압)		
Recommended(권고 전압)	V	10
Maximum(최대 전압)	V	15
Resistance(저항)		
Input(입력저항)	Ω	350±3.5
Output(출력저항)	Ω	350±3.5
Insulation(절연저항)	MΩ	>2000@50V DC
Compensated Temp.Range	°C	+50 ~ +150
Operating Temp.Range(작동범위)	°C	-20 ~ +180



NO	TITLE	MATERIAL	Q'TY	REMARKS		
TOLERANCES UNLESS OTHERWISE SPECIFIED		NAME OR TITLE		CURIOSITY TECHNOLOGY CURIOTEC. CO. LTD 581-1, Yongmi-ri, Goangtan-myeon, Paju-si, Gyeonggi-do, South KOREA, 413-855		
ANGULAR ± 0.1		CCVP-70TH SPEC				
DECIMAL ± 0.1		FIRST USED IN ASSEMBLY	MATERIAL Paint finished steel			
Q'TY/SET		FIRST MADE FOR	END FINISH			
CONTRACT OR CUSTOMER NO		DIMENSIONS ARE IN (MM), INCH				
DRAWN	CHECKED 1	CHECKED 2	APPROVED	SCALE	DRAWING.PART NO.	REV
G.J.HAN				N/S	CCVP-70TH -SPEC	0
2020.02.11						