


REV	DATE	DESCRIPTION	DRAWN	CHECKED	APPROVED
-----	------	-------------	-------	---------	----------

Capacity(용량)	tf	300
Rated Output(정격 출력)	mV/V	2.0±0.2
Zero Balance(무부하 범위)	mV/V	0±0.1
Combined Error(종합 오차)	%RO	0.1
Repeatability(반복 출력 허용)	%RO	0.05
Creep for (30min)N분출력편차	%RO	0.05
Temperature effect on(온도변화에 따른 변위)		
Zero Value(영점값)	%RO/10°C	0.03
Output Value(출력값)	%RO/10°C	0.03
Excitation(인가전압)		
Recommended(권고 전압)	V	10
Maximum(최대 전압)	V	15
Resistance(저항)		
Input(입력저항)	Ω	800±40
Output(출력저항)	Ω	700±7
Insulation(절연저항)	MΩ	>2000
Compensated Temp.Range	°C	+50 ~ +150
Operating Temp.Range(작동범위)	°C	-20 ~ +180

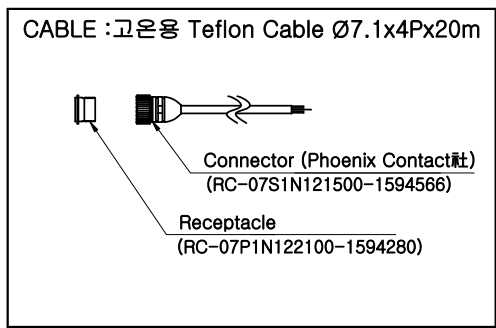

Cable Color Code

Ex+	▷ Red
Ex-	▷ White
Sig+	▷ Green
Sig-	▷ Blue
Shield	

NO	TITLE	MATERIAL	Q'TY	REMARKS
TOLERANCES UNLESS OTHERWISE SPECIFIED		NAME OR TITLE		
ANGULAR ± 0.1		CDSBP-300TH SPECIFICATION		
DECIMAL ± 0.1		FIRST USED IN ASSEMBLY		
Q'TY/SET		FIRST MADE FOR		
CONTRACT OR CUSTOMER NO		END FINISH		
DRAWN		CHECKED 1	CHECKED 2	APPROVED
SCALE		DIMENSIONS ARE IN (MM), INCH		
HB.S		N/S		
2019.08.30		CDSBP-300TH -SPEC		
		0		