




FEATURES

- Various capacity of detecting up 6 components
- Minimise interaction between components
- Protection class IP65
- High accuracy less than 0.5% on each components
- All products patent pending
- Order made (capacity, size)

DIMENSIONS

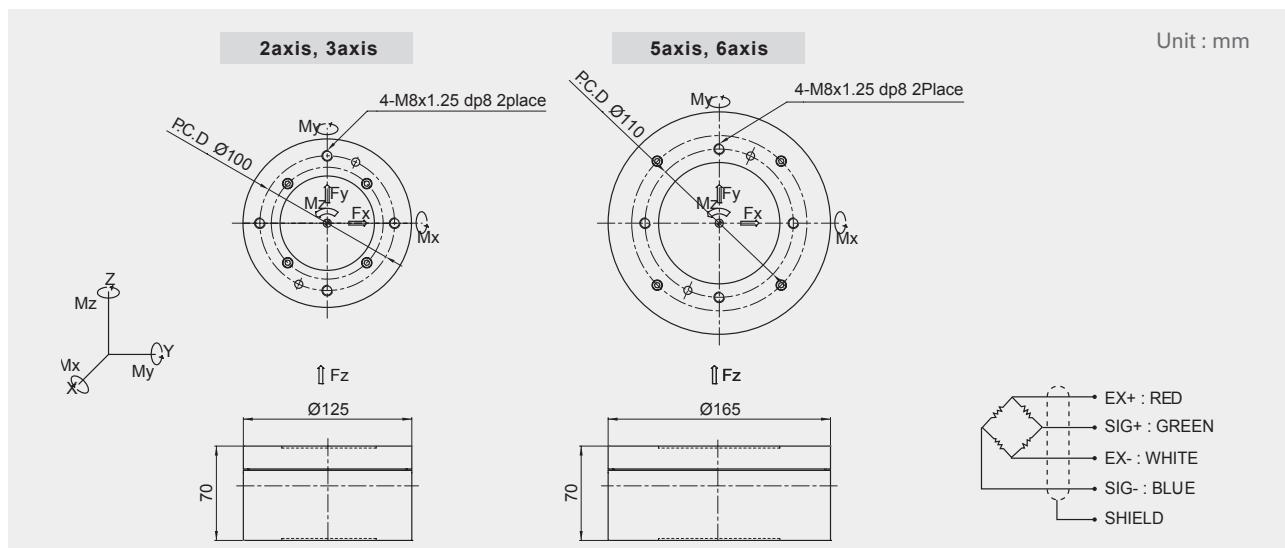

SPECIFICATIONS

Max. Capacity		kgf / kgf.m	2, 5, 10, 20, 50 kgf / 0.2, 0.5, 1, 2, 5 kgf.m
Rated output		mV/V	0.5 (approx)
Zero balance		mV/V	0 ± 0.1
Combined error		%RO	0.5
Repeatability		%RO	0.1
Creep (30min.)		%RO	0.05
Temperature effect on	Zero value	%RO/10°C	interference error : ± 3% FS
	Output value	%RO/10°C	0.1
			0.6
Excitation	Recommended	V	10
	Maximum	V	15
Resistance	Input	Ω	400 ± 50 / 800 ± 50
	Output	Ω	350 ± 3.5 / 700 ± 7
	Insulation	MΩ	> 2,000 @50V DC
Compensated temp. range		°C	-10 ~ +40
Operating temp. range		°C	-20 ~ +70